


Computer Graphics II: Rendering

CSE 168 [Spr 20], Lecture 3: Illumination and Reflection
Ravi Ramamoorthi

<http://viscomp.ucsd.edu/classes/cse168/sp20>



To Do

- Homework 1 (ray tracer) due early next week
- Next assignment direct lighting (on edX edge). Will cover that material next week


Illumination Models

Local Illumination

- Light directly from light sources to surface
- No shadows (cast shadows are a global effect)

Global Illumination: multiple bounces (indirect light)


- Hard and soft shadows
- Reflections/refractions (already seen in ray tracing)
- Diffuse and glossy interreflections (radiosity, caustics)



Some images courtesy Henrik Wann Jensen

Diffuse Interreflection

Diffuse interreflection, color bleeding [Cornell Box]



Radiosity



Caustics

Caustics: Focusing through specular surface



- Major research effort in 80s, 90s till today


Motivation: BRDFs, Radiometry

- Basics of Illumination, Reflection
- Formal radiometric analysis (not ad-hoc)
- Reflection Equation (Local Illumination)
- Discussion of BRDFs
- Rendering Equation (Global Illumination) on Thu
- Formal analysis important for correct implementation

Light

Visible electromagnetic radiation


Power spectrum



Polarization

Photon (quantum effects)

Wave (interference, diffraction)



From London and Upton

CS348B Lecture 4

Pat Hanrahan, 2009

Radiometry

- Physical measurement of electromagnetic energy
- Measure spatial (and angular) properties of light
 - Radiance, Irradiance
 - Reflection functions: Bi-Directional Reflectance Distribution Function or BRDF
 - Reflection Equation
 - Simple BRDF models


Angles and Solid Angles

■ Angle $\theta = \frac{l}{r}$

⇒ circle has 2π radians

■ Solid angle $\Omega = \frac{A}{R^2}$


⇒ sphere has 4π steradians



CS348B Lecture 4

Pat Hanrahan, 2009

Differential Solid Angles




$$dA = (r d\theta)(r \sin \theta d\phi) \\ = r^2 \sin \theta d\theta d\phi$$

CS348B Lecture 4

Pat Hanrahan, 2009

Differential Solid Angles




$$dA = (r d\theta)(r \sin \theta d\phi) \\ = r^2 \sin \theta d\theta d\phi$$

$$d\omega = \frac{dA}{r^2} = \sin \theta d\theta d\phi$$

CS348B Lecture 4

Pat Hanrahan, 2009

Differential Solid Angles

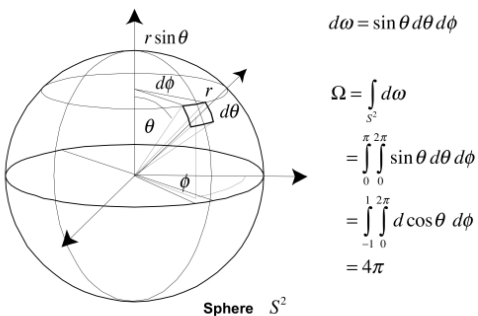

CS348B Lecture 4


Pat Hanrahan, 2009

Radiance

- Power per unit projected area perpendicular to the ray per unit solid angle in the direction of the ray


- Symbol: $L(x, \omega)$ (W/m² sr)

- Flux given by $d\Phi = L(x, \omega) \cos \theta \, d\omega \, dA$




Radiance properties

- Radiance constant as propagates along ray
 - Derived from conservation of flux
 - Fundamental in Light Transport.

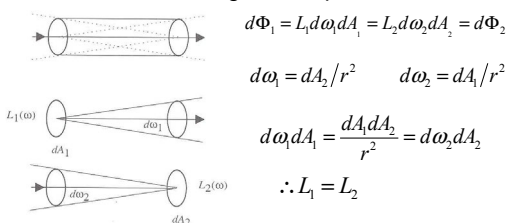

Quiz

Does radiance increase under a magnifying glass?

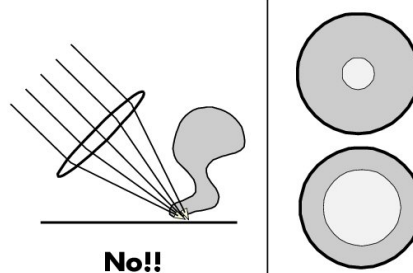


No!!

CS348B Lecture 4

Pat Hanrahan, Spring 2002

Quiz

Does the brightness that a wall appears to the eye depend on the distance of the viewer to the wall?



No!!

CS348B Lecture 4

Pat Hanrahan, Spring 2002

Radiance properties

- Sensor response proportional to radiance (constant of proportionality is throughput)
 - Far away surface: See more, but subtends smaller angle
 - Wall equally bright across viewing distances

Consequences

- Radiance associated with rays in a ray tracer
- Other radiometric quants derived from radiance
- This course primarily about computing radiance*

Irradiance, Radiosity

- Irradiance E is radiant power per unit area
- Integrate incoming radiance over hemisphere
 - Projected solid angle ($\cos \theta d\omega$)
 - Uniform illumination: Irradiance = π [CW 24,25]
 - Units: W/m^2
- Radiant Exitance (radiosity)
 - Power per unit area leaving surface (like irradiance)




Figure 2.8: Projection of differential area.

Directional Power Arriving at a Surface

$$d^2\Phi_i(x, \omega) = L_i(x, \omega) \cos \theta dA d\omega$$

CS348B Lecture 4

Pat Hanrahan, 2007


Irradiance from the Environment

$$d^2\Phi_i(x, \omega) = L_i(x, \omega) \cos \theta dA d\omega$$

$$dE(x, \omega) = L_i(x, \omega) \cos \theta d\omega$$



Light meter




CS348B Lecture 4

Pat Hanrahan, 2007

Uniform Area Source


$$\begin{aligned} E(x) &= \int_{H^2} L \cos \theta d\omega \\ &= L \int_{\Omega} \cos \theta d\omega \\ &= L \tilde{\Omega} \end{aligned}$$




CS348B Lecture 5

Pat Hanrahan, 2009

Irradiance Environment Maps

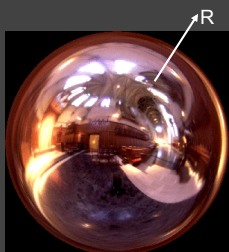

Incident Radiance
(Illumination Environment Map)



Irradiance Environment Map


Radiometry

- Physical measurement of electromagnetic energy
- Measure spatial (and angular) properties of light
 - Radiance, Irradiance
 - Reflection functions: Bi-Directional Reflectance Distribution Function or BRDF
 - Reflection Equation
 - Simple BRDF models

Types of Reflection Functions


Ideal Specular

- Reflection Law
- Mirror




Ideal Diffuse

- Lambert's Law
- Matte



Specular

- Glossy
- Directional diffuse



CS348B Lecture 10

Pat Hanrahan, Spring 2009

Materials



Plastic

Metal


Matte

From Apodaca and Gritz, *Advanced RenderMan*

CS348B Lecture 10

Pat Hanrahan, Spring 2009

Spheres [Matusik et al.]



CS348B Lecture 10


Pat Hanrahan, Spring 2009

Building up the BRDF

- Bi-Directional Reflectance Distribution Function [Nicodemus 77]
- Function based on incident, view direction
- Relates incoming light energy to outgoing
- Unifying framework for many materials

The BRDF

Bidirectional Reflectance-Distribution Function

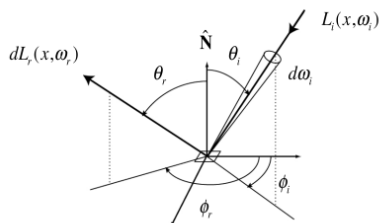

$$f_r(\omega_i \rightarrow \omega_r) \equiv \frac{dL_r(\omega_i \rightarrow \omega_r)}{dE_i} \left[\frac{1}{sr} \right]$$

CS348B Lecture 10

Pat Hanrahan, Spring 2009

BRDF


- Reflected Radiance proportional Irradiance
- Constant proportionality: BRDF
- Ratio of outgoing light (radiance) to incoming light (irradiance)
 - Bidirectional Reflection Distribution Function
 - (4 Vars) units 1/sr

$$f(\omega, \omega_r) = \frac{L_r(\omega_r)}{L_i(\omega) \cos \theta d\omega}$$

$$L_r(\omega_r) = L_i(\omega) f(\omega, \omega_r) \cos \theta d\omega$$

Properties of BRDF's


1. Linearity



From Sillion, Arvo, Westin, Greenberg

2. Reciprocity principle

$$f_r(\omega_r \rightarrow \omega_i) = f_r(\omega_i \rightarrow \omega_r)$$




CS348B Lecture 10

Pat Hanrahan, Spring 2009

Properties of BRDF's

3. Isotropic vs. anisotropic

$$f_r(\theta_i, \varphi_i; \theta_r, \varphi_r) = f_r(\theta_i, \theta_r, \varphi_r - \varphi_i)$$



Reciprocity and isotropy

$$f_r(\theta_i, \theta_r, \varphi_r - \varphi_i) = f_r(\theta_r, \theta_i, \varphi_i - \varphi_r) = f_r(\theta_i, \theta_r, |\varphi_r - \varphi_i|)$$


4. Energy conservation

CS348B Lecture 10


Pat Hanrahan, Spring 2009

Isotropic vs Anisotropic

- Isotropic: Most materials (you can rotate about normal without changing reflections)
- Anisotropic: brushed metal etc. preferred tangential direction



Isotropic




Anisotropic

Energy Conservation

$$\frac{d\Phi_r}{d\Phi_i} = \frac{\int_{\Omega_r} L_r(\omega_r) \cos \theta_r d\omega_r}{\int_{\Omega_i} L_i(\omega_i) \cos \theta_i d\omega_i}$$

$$= \frac{\int_{\Omega_r} \int_{\Omega_i} f_r(\omega_i \rightarrow \omega_r) L_i(\omega_i) \cos \theta_i d\omega_i \cos \theta_r d\omega_r}{\int_{\Omega_i} L_i(\omega_i) \cos \theta_i d\omega_i}$$


$$\leq 1$$



CS348B Lecture 10

Pat Hanrahan, Spring 2009


Reflection Equation

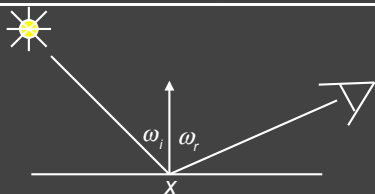

$$L_r(x, \omega_r) = L_e(x, \omega_r) + \sum_i L_i(x, \omega_i) f_r(x, \omega_i, \omega_r) (\omega_i \cdot n)$$

Reflected Light (Output Image) Emission Incident Light (from light source) BRDF Cosine of Incident angle

Reflection Equation

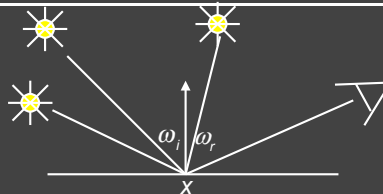


Sum over all light sources

$$L_r(x, \omega_r) = L_e(x, \omega_r) + \sum_i L_i(x, \omega_i) f_r(x, \omega_i, \omega_r) (\omega_i \cdot n)$$

Reflected Light (Output Image) Emission Incident Light (from light source) BRDF Cosine of Incident angle

Reflection Equation

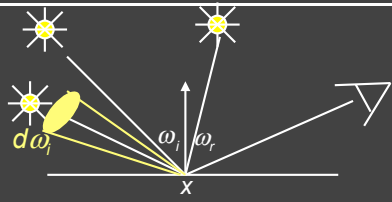

Replace sum with integral

$$L_r(x, \omega_r) = L_e(x, \omega_r) + \int_{\Omega} L_i(x, \omega_i) f(x, \omega_i, \omega_r) \cos \theta_i d\omega_i$$

Reflected Light (Output Image)	Emission	Incident Light (from light source)	BRDF	Cosine of Incident angle
-----------------------------------	----------	--	------	-----------------------------

Environment Maps

- Light as a function of direction, from entire environment
- Captured by photographing a chrome steel or mirror sphere
- Accurate only for one point, but distant lighting same at other scene locations (typically use only one env. map)




Blinn and Newell 1976, Miller and Hoffman, 1984
Later, Greene 86, Cabral et al. 87


Environment Maps

- Environment maps widely used as lighting representation
- Many modern methods deal with offline and real-time rendering with environment maps
- Image-based complex lighting + complex BRDFs


Radiometry

- Physical measurement of electromagnetic energy
- Measure spatial (and angular) properties of light
 - Radiance, Irradiance
 - Reflection functions: Bi-Directional Reflectance Distribution Function or BRDF
 - Reflection Equation
 - Simple BRDF models


Brdf Viewer plots



Diffuse



Torrance-Sparrow




Anisotropic

bv written by Szymon Rusinkiewicz

Ideal Diffuse Reflection

Assume light is equally likely to be reflected in any output direction (independent of input direction).



$$L_{r,d}(\omega_r) = \int f_{r,d} L_i(\omega_i) \cos \theta_i d\omega_i$$

$$= f_{r,d} \int L_i(\omega_i) \cos \theta_i d\omega_i$$

$$= f_{r,d} E$$


$$M = \int L_r(\omega_r) \cos \theta_r d\omega_r = L_r \int \cos \theta_r d\omega_r = \pi L_r$$

$$\rho_d = \frac{M}{E} = \frac{\pi L_r}{E} = \frac{\pi f_{r,d} E}{E} = \pi f_{r,d} \Rightarrow f_{r,d} = \frac{\rho_d}{\pi}$$

Lambert's Cosine Law $M = \rho_d E = \rho_d E_s \cos \theta_s$

CS348B Lecture 10
Pat Hanrahan, Spring 2002

Phong Model

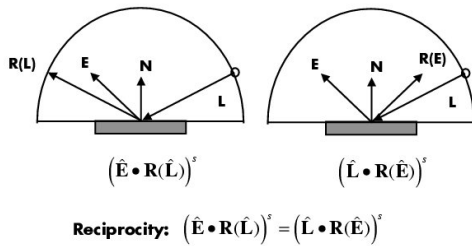


Distributed light source!

CS348B Lecture 10

Pat Hanrahan, Spring 2002

Specular Term (Phong)


Phong Model

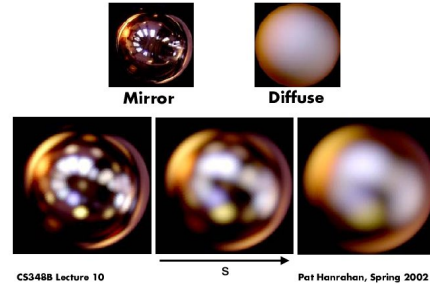

CS348B Lecture 10

Pat Hanrahan, Spring 2002

Fresnel Reflectance

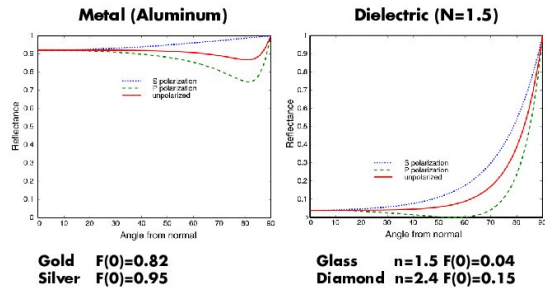

Schlick Approximation $F(\theta) = F(0) + (1 - F(0))(1 - \cos\theta)^5$

CS348B Lecture 10

Pat Hanrahan, Spring 2002

Experiment

Reflections from a shiny floor




From Lafortune, Foo, Torrance, Greenberg, SIGGRAPH 97

CS348B Lecture 10

Pat Hanrahan, Spring 2002

Torrance-Sparrow

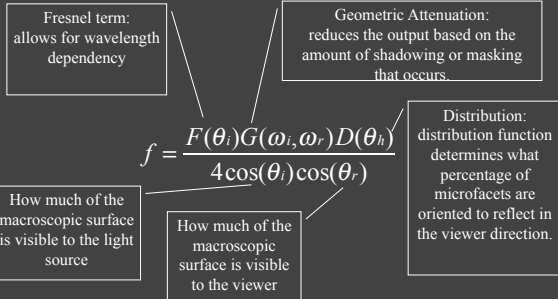

Other BRDF models

- Empirical: Measure and build a 4D table
- Anisotropic models for hair, brushed steel
- Cartoon shaders, funky BRDFs
- Capturing spatial variation
- Very active area of research